
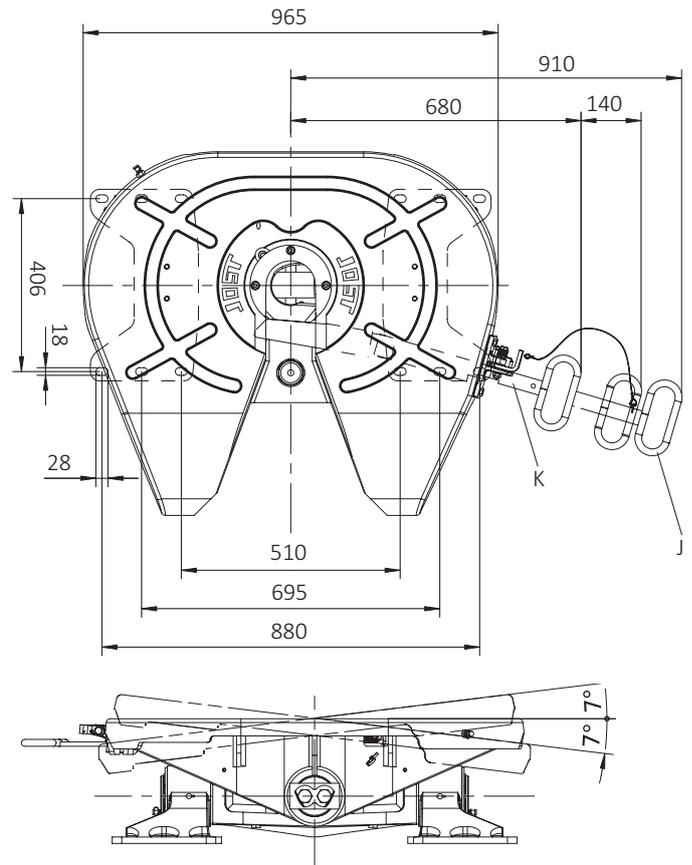


Heavy duty – Fifth wheel couplings · JSK 38 G1

Advantages at a glance

- Especially robust heavy duty fifth wheel coupling
- The cardan bearing allows the semi-trailer to be used off-road without distortion
- Retrofittable from 2" or 3½" and vice versa

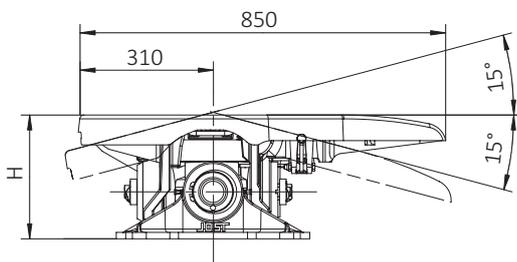

Selection table / Versions available

Order No.	H (mm)	D value (kN)	Lock	Imposed load U (t)	Weight (kg)	Approval (ECE)	WA	ZL
JSK 38 G1 Z	290	260	3½"	36	265	E1 55R-01 0339	Z	K
JSK 38 G1 ZJ	290	260	3½"	36	265	E1 55R-01 0339	Z	J
JSK 38 G1-2Z	290	170	2"	28	265	E1 55R-01 0443	Z	K
JSK 38 G1-2ZJ	290	170	2"	28	265	E1 55R-01 0443	Z	J

Explanatory notes for the selection tables please refer to page 15.

Technical Specification

Designed for 2" king pins (50) as per ECE R55-01, DIN 74080, ISO 337 and steering wedges as per ECE R55-01, DIN 74085 or for 3½" king pins (S) as per ECE R55-01, DIN 74083, ISO 4086.




Did you know ...

... that the lateral suspension must be disabled for on-road use..

JSK 38 G1 / G1-2" / ... Z

Spare parts

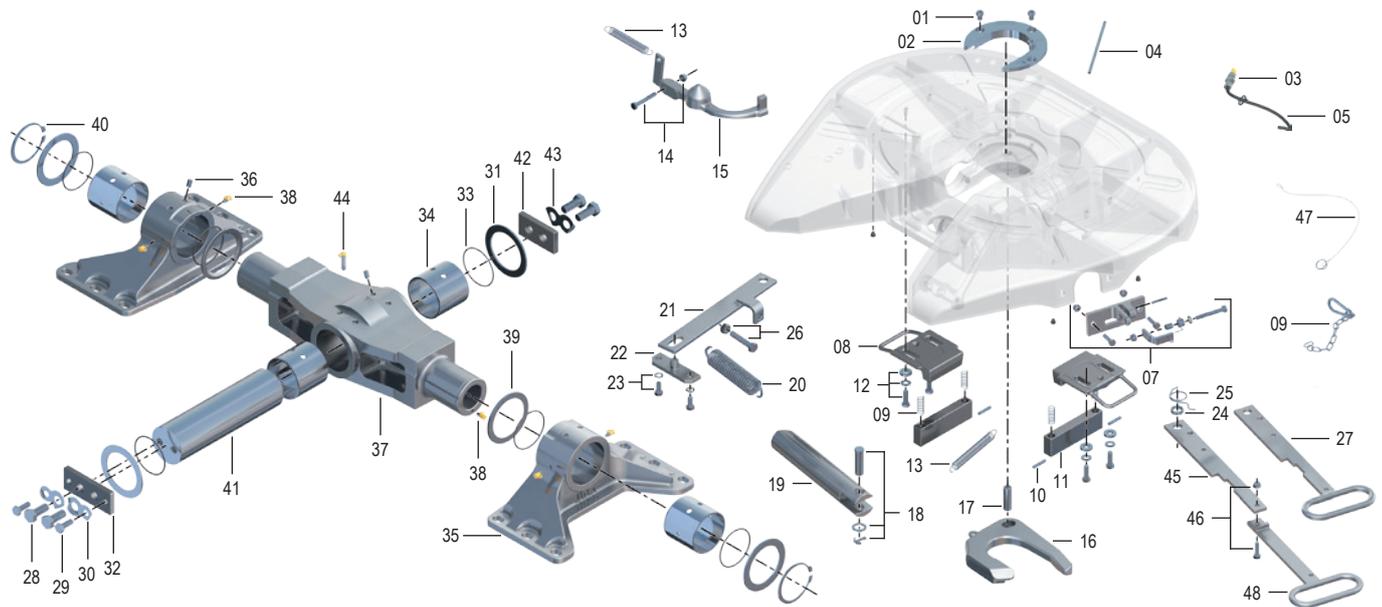

Item	Description	Remark	Order No.	per JSK
01	Socket head bolt		SK 2421-08	3
02	Wearing ring	3½", compl. with 01	SK 2421-56	1
02	Wearing ring	2", compl. with 01	SK 2421-57	1
03	Nut and bolt		SK 1976	1
04	Lubrication tube		SK 1989	1
05	Lubrication line	compl. with cable tie, for type Z	SK 2508-02	1
06	Spring hook	compl. up to xx70xxxxx	SK 1436	1
07	Latch	compl.	SKE240508400	1
08	Stopper	compl.	SK 2506-22	2
09	Pressure spring		SK 2506-15	4
10	Clamping sleeve		SK 2521-10	4
11	Bush		SK 2506-35	2
12	Hexagon bolt	compl.	SK 2521-50	4
13	Tension spring		SK 2106-01	2
14	Hexagon bolt	compl.	SK 2421-51	1
15	Latch		SK 2405-27	1
16	Lock jaw	compl. with cable tie, 3½" for type M	SK 2405-14	1
16	Lock jaw	compl. with cable tie, 3½" for type Z	SK 2405-14 Z	1
16	Lock jaw	compl. with cable tie, 2" for type M	SK 2405-13	1
16	Lock jaw	compl. with cable tie, 2" for type Z	SK 2405-13 Z	1
17	Bolt		SK 2405-18	1
18	Bar bolt	compl.	SK 2121-14	1
19	Locking bolt		SK 2405-01	1
20	Double tension spring		SK 2405-23	1
21	Lever		SK 2405-04	1
22	Bearing		SK 2405-15	1

Item	Description	Remark	Order No.	per JSK
23	Hexagon bolt	compl.	SK 2421-53	2
24	Washer		SK 2405-19	1
25	Spring noose		SK 2405-09	1
26	Hexagon bolt	compl.	SK 2421-52	1
27	Short handle	for type K	SK 2405-066	1
28	Hexagon bolt		SK 2034	4
29	Hexagon bolt		SK 2521-18	2
30	Locking plate		SK 2504-21	2
31	Spacer washer		SK 2504-14	4
32	Plate		SK 2504-18	1
33	Round seal		SK 2521-07	6
34	Bearing bushing		SK 2504-16	4
35	Pedestal BH 290 (ISO)	with 34, 36 + 38	SK 2521-52	2
36	Cylindrical notched pin		SK 1533	8
37	Rocker arm	compl. with 34, 36, 38 + 44	SK 2521-51	1
38	Taper grease nipple		SK 2521-04	6
39	Spacer washer		SK 1192-1	2
40	Locking ring		SK 1435	2
41	Pivot pin		SK 2504-17	1
42	Clamping plate		SK 2504-19	1
43	Locking plate		SK 2504-20	1
44	Taper grease nipple + extens.		SK 2521-57	1
45	Locking bolt	for type J	SK 2405-067	1
46	Hexagon bolt	compl. for type J	SK 2421-50	1
47	Latch cord	compl. for type J	SK 3521-02	1
48	Long handle	for type J	SK 3105-113	1

Repair and retrofit kits

Item	Description	Order No.
01, 02, 06, 13, 16, 17, 20	Repair kit for lock 3½", for type G	SK 2421-76
01, 02, 05, 06, 13, 16, 17, 20	Repair kit for lock 3½", for type GZ	SK 2421-76 Z
01, 02, 06, 13, 16, 17, 20	Repair kit for lock 2", for type G	SK 2421-77
01, 02, 05, 06, 13, 16, 17, 20	Repair kit for lock 2", for type GZ	SK 2421-77 Z
01, 02, 13, 16	Conversion kit for lock 3½" in 2", for type G	SK 2421-98

Item	Description	Order No.
01, 02, 13, 16	Conversion kit for lock 2" in 3½", for type G	SK 2421-99
01, 02, 13, 16	Conversion kit for lock 3½" in 2", for type GZ	SK 2421-98 Z
01, 02, 13, 16	Conversion kit for lock 2" in 3½", for type GZ	SK 2421-99 Z
28, 29, 30, 33, 34, 36, 38, 43, 44	Repair kit for bearing for type G/GZ	SK 2521-76
46, 47	Retrofit kit handle extension compl., for type G/GZ	SK 3121-063